

JS Motorized Ball Valve





Operation voltage for On/Off Standard type	• 24VDC • 24VAC/VDC • 110VAC (1PH) • 220VAC (1PH)
Media	Oil, Air, Water
Fluid temp.	10~50°C Other temp. available on request
Pressure range	Max. 10 kgf/cm ²
Valve material	SS316
Valve type	2-way threaded ball valve
Control method	ON/OFF type Modulating type
Dust/Waterproof	IP67 according to IEC 60529
Certification	Comply with CE directives

Description

The KUHNWAY motorized ball valve combines an electric actuator with a two-way threaded SUS 316 ball valve, offering simple operation, high reliability, and long service life.

Available in threaded or flanged connections, it is ideal for remote control and automation in water systems, heating, and other applications.

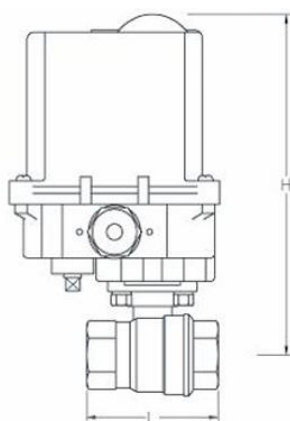

Dimension (mm)

MODEL	PIPE SIZE		L	H	D
	mm	in			
JS-01-15-BLV	DN15	1/2"	60 (69)	186	127
JS-01-20-BLV	DN20	3/4"	67 (80)	190	127
JS-01-25-BLV	DN25	1"	83 (90)	195	127
JS-01-32-BLV	DN32	1-1/4"	97 (106)	202	127
JS-01-40-BLV	DN40	1-1/2"	107 (120)	217	127
JS-02-50-BLV	DN50	2"	130 (140)	223	127