

JS Motorized Threaded Ball Valve for Steam





Operation voltage for On/Off Standard type	• 24VDC • 24VAC/VDC • 110VAC (1PH) • 220VAC (1PH)
Media	High temp. liquid(gas), light oil, steam
Fluid temp.	0 ~ 180°C
Pressure range	Max. 10 kgf/cm ²
Valve material	SS316
Valve type	2-way threaded ball valve
Control method	ON/OFF type Modulating type
Dust/Waterproof	IP67 according to IEC 60529
Certification	Comply with CE directives

Description

The KUHNWAY motorized ball valve combines an electric actuator with a two-way threaded SUS 316 ball valve, offering simple operation, high reliability, and long service life.

Available in threaded or flanged connections, it is ideal for remote control and automation in water systems, heating, and other applications.

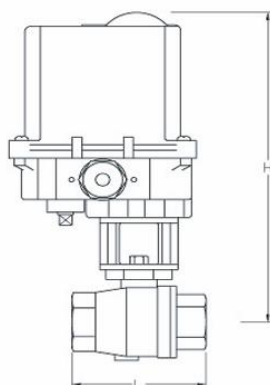

Dimension (mm)

MODEL	PIPE SIZE		L	H	D
	mm	in			
JS-01-15S-BLV	DN15	1/2"	62	214	127
JS-01-20S-BLV	DN20	3/4"	73	219	127
JS-01-25S-BLV	DN25	1"	80	224	127
JS-01-32S-BLV	DN32	1-1/4"	96	235	127
JS-01-40S-BLV	DN40	1-1/2"	115	239	127
JS-02-50S-BLV	DN50	2"	133	250	127